



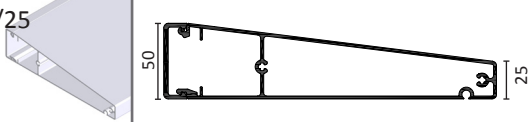




Lameloversigt

RECTUS- lameller til Blendex solskærme

Typebetegnelse (Bredde/højde i mm)	Profil (1:5)	Vægt (kg/m)	Perimeter (mm)	Maksimal spændvidde (i mm)			
				Ved lamelhældning på			
				0°	15°	30°	45°
R70/10		0,736	159	1550	1600	1650	1800
R100/20		1,442	239	2500	2550	2650	2850
R150/20		2,209	340	2600	2600	2700	2900
R200/25		2,892	450	3050	3100	3200	3400
R220/25		0,594 3,037	158 663	4200	4250	4400	4700
R240/20/40		3,642	537	3500	3550	3700	3950
R300/25		4,768	649	3000	3050	3150	3350

De anførte maksimale spændvidder er gældende ved en acceptabel udbøjning for egenvægten på 1/750 af spændvidden. Der er **IKKE** medtaget variable laster, som f.eks. snelast og vindlast.